

## 超级电容器

## 产品规格书

# Electrical Double Layer Capacitor Data Sheet

**客户Customer:**

**产品Product:** 15V300F

**型号Code:** SMD150R301CAAZC00

**日期Date:** 2022/10/08



公司地址：中国·重庆市九龙坡区凤笙路 21 号金凤园区新材料产业园 4 号楼

Add: 21 Fengsheng Road, Bld.4, Novel Material Branch of Jinfeng Electronic Information Industrial park, Hi-tech Industrial Development Zone, Chongqing, China

联系电话(Tel): +86-023-65935981

网址(Website): [www.zkcrtech.com](http://www.zkcrtech.com)

项目	品管	审核	客户核准

## 1. 适用范围 Scope

此规格书对产品的性能，测试方法进行了规范，作为技术确认的依据。

As a basis for technical confirmation, this sheet specifies the performance and test methods of the product .

## 2. 产品特性 Features

- ★High energy density 比能量大
- ★High power density 高功率
- ★Long cycle life 寿命长
- ★Safe and reliable 安全可靠
- ★Environment-friendly 环境友好
- ★Maintenance-free 免维护
- ★Charge-discharge speed at the scale of second 充放电速度可达秒级

## 3. 应用领域 Applications

- ★Energy storage system 储能系统
- ★Heavy-duty machinery 重型机械
- ★Automation equipment 自动化设备
- ★DTU/FTU
- ★Medical equipment 医疗设备

## 4. 命名规则 Designation

SMD	150	R	301	CA	A	Z	C0	0
Module classification 模组分类	Rated Voltage 额定电压(V)	Tolerance 容量偏差(%)	Rated Capacitance 额定容量(F)	Structure 引出方式	Packaging 包装	Manufacture 制造商	Module PCB status and version 模组PCB状态及版本信息	Module version 模组版本信息
EDLC Module 双电层 电容器模组	15V	0 ~ +20%	300F	接线柱引出	铝合金外壳	中科超容	被动均压电阻泄放，无 信号输出	第1版

## 5. 标准测试条件 Test Conditions

环境温度 Ambient temperature: 15°C ~ 35°C

湿度 Humidity: 25%RH ~ 75%RH

气压 Pressure: 86kPa~106kPa

\*电容量、内阻和漏电流尤其受温度的影响很大，如对结果有疑问，应按以下条件进行测量：

The capacitance, internal resistance and leakage current are particularly affected by temperature.

If in doubt about results, make measurements under the following conditions:

环境温度 Ambient temperature: 20°C±2°C

湿度 Humidity: 63%RH ~ 67%RH



气压 Pressure: 86kPa~106kPa

## 6. 性能参数 Parameters

电气性能 Electrical Performance		
容量 Capacitance	额定容量, Rated Capacitance, F	300
	容量偏差, Capacitance Tolerance, %	0 ~ +20
电压 Voltage	额定可承受电压, Rated Voltage, V.DC	15
	浪涌电压, Surge Voltage, V.DC	15.75
内阻 Internal Resistance	DC/ mΩ@25°C	1.4
	AC 1kHz/mΩ@25°C	1.1
电流 Current	72 小时泄漏电流, 72-hour Leakage Current, μA	15
	最大持续电流 Maximum Continuous Current (ΔT=15°C), A	84
	1s 最大峰值电流, 1s Maximum peak Current, A	1395
质量 Mass	典型质量, Typical mass, kg	4
能量 Energy	最大存储能量, Maximum stored Energy, Wh	15
	能量密度, Energy Density, Wh/kg	3.7
功率密度 Power Density	功率密度, Power Density, kW/kg	3.24
温度 Temperature		
温度区间 Temperature Range	工作温度范围, Temperature for Operation, °C	-40 ~ +65
	存储温度范围, Temperature for Storage, °C	-40 ~ +70
寿命 Life		
使用期限 Life Time	额定电压下工作 10 年 After 10 years at rated voltage(25°C)	
	容量变化 (初始值衰减) Capacitance change (decrease from initial value)	≤ 20%
	内阻变化 (初始值增大) Internal Resistance (increase from initial value)	≤ 2 倍 (times)
耐久性 Endurance	额定电压下工作 1500 小时 After 1500 hours at rated voltage (65°C)	
	容量变化 (初始值衰减) Capacitance change (decrease from initial value)	≤ 20%
	内阻变化 (初始值增大) Internal Resistance (increase from initial value)	≤ 2倍 (times)
保存期限 Shelf Life	4 年 (25°C, 未充电) 4 years (25°C, uncharged)	
循环寿命 Cycle Life	25°C恒定电流, 额定电压到 1/2 额定电压之间循环 100 万次 Constant current at 25 °C, 1000,000 cycles between rated and 1/2 rated voltages	
	容量变化 (初始值衰减) Capacitance Change (decrease from initial value)	≤ 20%
	内阻变化 (初始值增大) Internal Resistance (increase from initial value)	≤ 2 倍 (times)

## 7. Product Structure Interface Definition 产品结构 接口定义

### 7.1 Dimensions 外形尺寸(Units 单位: mm)

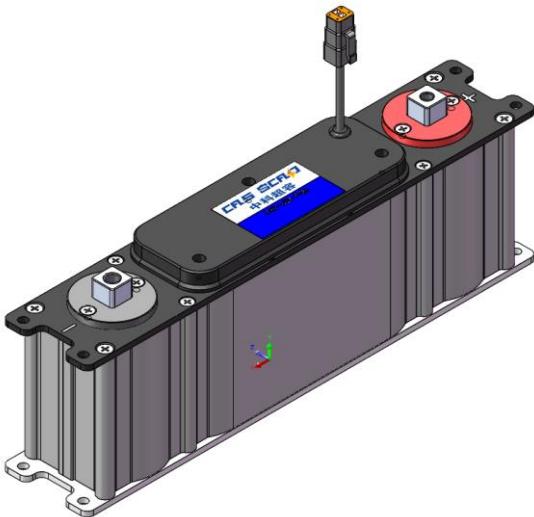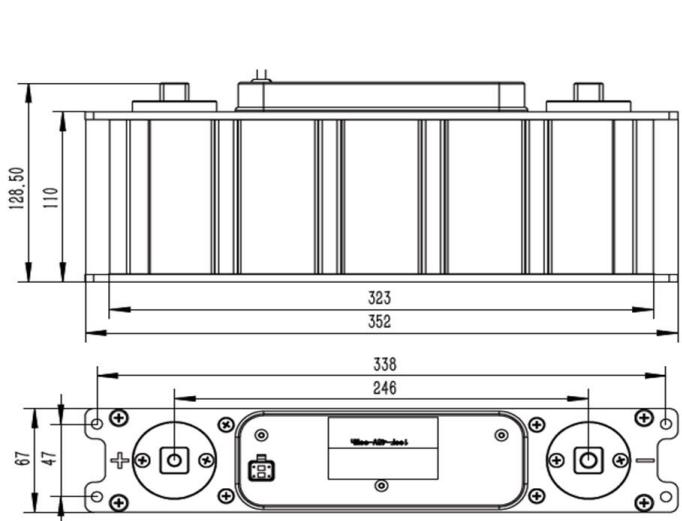

Length 长度 (mm)	Width 宽度 (mm)	Height 高度 (mm)	Remark 备注
352	67	129	

### 7.2 Signal Connector 信号接口器

#### 7.2.1 Interface Definition 接口定义

Connector 连接器			
Items 序号	Location 位置	Model 型号	备注 Remark
1	超级电容模组端 Terminal of the module	无	
Items 序号	Number 端子编号	function 端子功能	Remark 备注
1	1	无	
2	2		
3	3		
4	4		


#### 7.2.2 推荐示意图

无

## 8. Testing method 产品测试方法

### 8.1 Rated Capacitance (six-step, F) and DC internal resistance (six-step , Ω)

额定容量(六步法, F)和直流内阻(六步法, Ω)

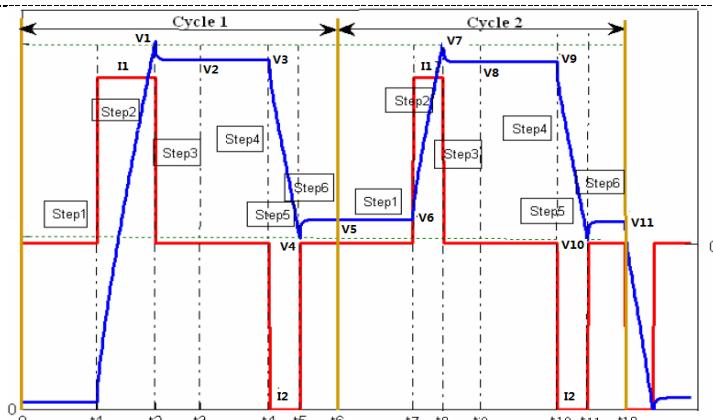

No.	Items 项目	condition 条件	Remark 备注
1	搁置10s		$V_0$
2	恒流充电 $I_1$	以 $I_1$ 恒流充电至额定电压 $U_R$	$I_1$ 、 $V_1$
3	搁置5s		
4	搁置10s		$V_3$ 、 $t_4$
5	恒流放电 $I_2$	以 $I_2$ 恒流放电至50% $U_R$	$I_2$ 、 $V_4$ 、 $t_5$
6	搁置5s		$V_5$ 、 $t_6$
7	重复步骤1-6, 重复1次		$T_{10}$ 、 $t_{11}$ 、 $V_9$ 、 $V_{10}$ 、 $V_{11}$
8	结束	以 $I_2$ 恒流放电至0.1V以下	

Parameter calculation 参数计算:

- Two-cycle discharge capacity 两次循环放电容量:

$$Cd_{ch1} = I_2 \times \frac{t_5 - t_4}{V_3 - V_4};$$

$$Cd_{ch2} = I_2 \times \frac{t_{11} - t_{10}}{V_9 - V_{10}}$$

- Discharge capacity 放电容量:

$$Cd_{ch} = \frac{Cd_{ch1} + Cd_{ch2}}{2}$$

- Two-cycle discharge DC internal resistance 两次循环放电直流内阻:

$$ESR_{dch1} = \frac{V_5 - V_4}{I_2};$$

$$ESR_{dch2} = \frac{V_{11} - V_{10}}{I_2}$$

- DC discharge resistance 直流放电内阻:


$$ESR_{dch} = \frac{ESR_{dch1} + ESR_{dch2}}{2}$$

Among them:  $I_1 = I_2 = 50A$ , in the parameter table, the DC internal resistance refers to the six-step DC discharge internal resistance.

\*其中:  $I_1 = I_2 = 50A$  参数表中, 直流内阻  $ESR_{DC}$  指六步法直流放电内阻。

## 8.2 AC internal resistance 交流内阻 $ESR$ ( $\Omega$ )

Measuring circuit 测量电路

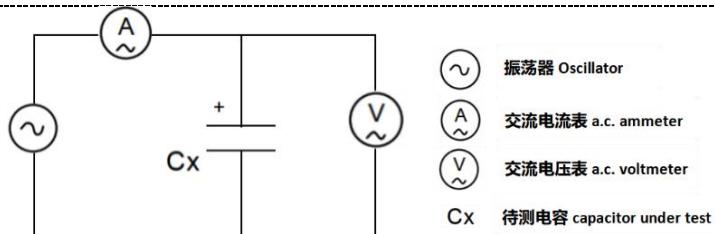

$$\text{ESR calculation 内阻计算公式: } R_{AC} = \frac{U}{I}$$

U: AC voltage rms 交流电压有效值 (V r.m.s)

I: AC current rms 交流电流有效值 (A r.m.s)

Measurement frequency of the voltage 测量电压的频率 : 1 kHz;

Measurement the AC current 测量交流电流 : 1mA ~ 10mA

### 8.3 Maximum Continuous Current 最大持续电流

Maximum continuous working current within 15 °C of temperature change

最大持续工作电流 ( $\Delta T=15^{\circ}\text{C}$ ) :

$$I_{cc} = \sqrt{\frac{\Delta T}{ESR_{DC} * R_{th}}}$$

### 8.4 Maximum Peak Current 最大峰值电流 (A)

Maximum current needed to discharged from rated voltage to half rated voltage in 1 second

一秒钟放电至一半额定电压的最大放电电流:

$$I_{\max} = \frac{\frac{1}{2} \times U_R}{ESR_{DC} + \frac{1}{C}}$$

### 8.5 Energy and Power 能量与功率 (mass: Product quality 产品质量)

Maximum stored energy (Wh) 最大储存能量 :

$$E_{\max} = \frac{\frac{1}{2} \times C \times U_R^2}{3600}$$

Specific Energy (Wh kg) 能量密度 :

$$E_d = \frac{\frac{1}{2} \times C \times U_R^2}{3600 \times \text{mass}}$$

Usable Specific Power (W kg) 功率密度 :

$$P_d = \frac{0.12 \times U_R^2}{ESR_{DC} \times \text{mass}}$$

## 9. 注意事项 Cautions

下述注意事项需严格遵守。对于没有按照以下注意事项所造成的任何意外事故, **重庆中科超容科技有限公司** 不负担任何责任。

The warnings should be followed seriously, otherwise **Chongqing CAS Supercap Technology Co., Ltd.** is not responsible for any loss caused by misconduct.

**!** 注意事项

- 超级电容器应在额定电压和规定工作温度区间使用，不宜超过70°C，并远离超过工作温度区间的热源；
- 超级电容器在使用前需确认正/负极，禁止反向充电。若正负极接反，会降低超级电容器的充放电性能，并会导致发热、泄露和使用寿命快速衰减。
- 超级电容器在使用前用干布对正/负极端子进行清洁，避免接触电阻过大降低超级电容使用性能。
- 禁止将超级电容器投入火中或进行高压加热。
- 禁止将超级电容直接与水、油、酸或碱接触。
- 禁止挤压、钉刺和拆解超级电容器。
- 禁止将带有 0.5V 以上电压的超级电容器进行正/负极短接；
- 在使用或储存期间如发现超级电容器有散发气味、变色、变形或其它反常之处应停止使用。
- 超级电容器所使用的电解液极易挥发，请不要随意分解超级电容器。
- 超级电容器不能随意丢弃，需请根据国家环保标准进行处理。

**!** Cautions

- The capacitor should be used in the rated voltage and specified operating temperature range with no more than 85 °C, and stay away from heat sources that exceed the operating temperature range;
- The positive/negative electrodes of the capacitor must be confirmed before use, and reverse charging is prohibited. The reverse connection will reduce the performances of the capacitor and cause heat cause heat generation, leakage and rapid deterioration of service life;
- Clean the positive/negative terminals with a dry cloth before use to avoid excessive contact resistance, which would degrade the performances of the capacitor;
- Do not put the capacitor into fire or heat it under high pressure;
- Do not contact directly the capacitor with water, oil, acid or alkali ;
- Do not squeeze, prick and disassemble the capacitor;
- Do not short-circuit the positive/negative electrodes of the capacitor with voltages above 0.5V;
- Stop using the capacitor if it is found to emit odor, discoloration, deformation or other abnormalities during use or storage;
- Do not disassemble the capacitor at will because the electrolyte is volatile;
- Do not discard the capacitor at will, Please dispose of it according to national environmental protection standards.

**如有任何关于超级电容器的问题，请与我们联系。**

**Please contact with us if you have any question on our products.**